


# LIFT WITH EASE

Efficient and ergonomic  
material handling



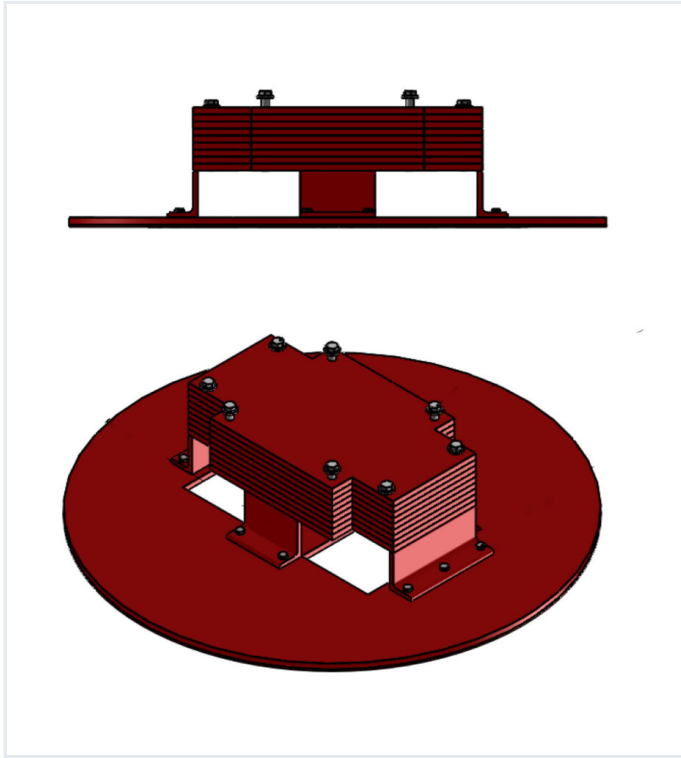


Item No.: Platforms FlexiCrane

## FlexiCrane platforms



Platform diameter (mm)	1150, 1490
Maximum capacity (kg)	40, 65
Weight (kg)	290, 388
Height (mm)	225



Our cranes can be mounted on a movable platform, allowing the crane to be moved with a pallet truck. This applies primarily to the FlexiCrane and FlexiCrane 3 m, but a custom-made Jib crane also be adapted to fit a mobile base. To move the crane, insert the forks of the forklift or pallet truck into the holes in the platform. Lift and move to a suitable location where the floor is level.

## Versions

Article number	Platform diameter (mm)	Maximum capacity (kg)	Weight (kg)	Height (mm)	Configuration height (mm)	Height from the floor (mm)
 95-10319	1490	65	388	225	225	225
 95-10300	1150	40	290	225	225	225



## **CONTACT US**

### **USA**

Lifts All Inc.  
728 William Blount Dr,  
Maryville, TN 37801  
USA  
E-mail: [info@liftsall.us](mailto:info@liftsall.us)  
Telephone: +1 865-324-2014  
Website: [liftsall.com](http://liftsall.com)

### **HEAD OFFICE WORLDWIDE**

Lifts All AB  
Passadvägen 10  
176 67 Järfälla  
Sverige  
E-mail: [lifting@liftsall.se](mailto:lifting@liftsall.se)  
Telephone: 08-754 90 15  
Website: [liftsall.com](http://liftsall.com)